

SCAN-PAC ANNOUNCES NEW RF32 MATERIAL

Dear Customer,

Scan-Pac is pleased to announce the release of its new RF32 material to its line of industrial friction material product offerings. RF32 is an excellent non-metallic material with medium coefficient of friction at .33 normal and .32 hot. This material also boasts excellent fade and recovery characteristics and was designed for use on tensioning brakes and clutches.

RF32 features an incredibly low wear rate of .001max (inch³/hp-hr) which is more than 50% lower than similar materials supplied by the competition. In addition, this material offers smooth engagement on clutches and brakes, and it's non-abrasive which will keep interface temperatures down. As mentioned, the design intent for this material was tensioning style brakes and




Picture of RF32

common applications are conveyors, papermill unwind machines, flexo printing, and escalators and moving walkways.

Scan-Pac Manufacturing continues to be the industry leader in development of new friction materials for challenging applications. The company employs two PhD chemists who are devoted to designing the highest performing friction materials in the market. Next time you need a friction material or when an off-the-shelf formulation does not meet your requirements, please give our R&D experts the opportunity to work with you.

SAE J661A TEST CURVES

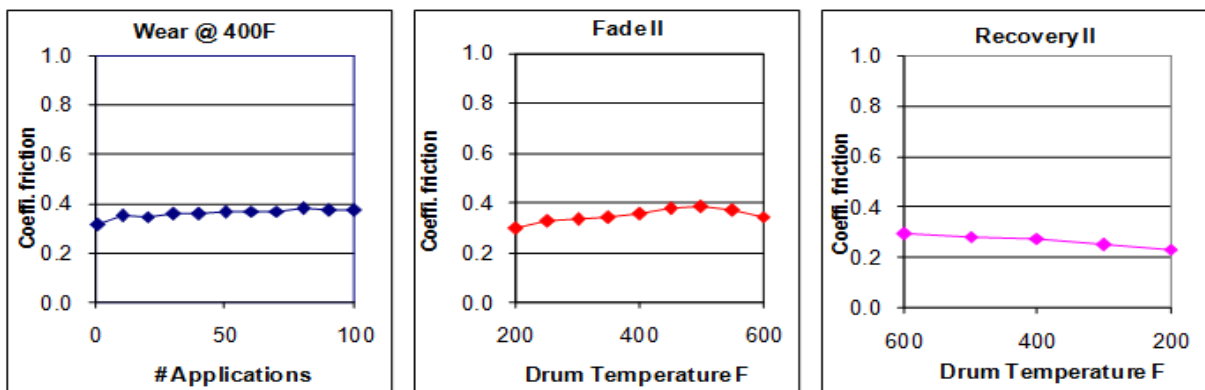

Scan-Pac Mfg. is a manufacturer of non-asbestos friction materials and phenolic laminates for use in a wide range of industrial and oilfield applications. The company has three manufacturing



locations that include two facilities in Menomonee Falls, Wisconsin and one in Magnolia, Texas. Scan-Pac employs 100 individuals and has proudly been in business for more than 40 years.

Check out our newly updated website and download our Scan-Pac App using the links below, or find it on the App Store or Google Play.



Thanks and best regards,

Jeff Lichey
VP, Sales & Marketing