



Product Data Sheet: Gemini-GX

PRODUCT DESCRIPTION

Gemini-GX is a flexible extruded lining in the medium to high friction range that is suitable for both wet (when cured) and dry applications. Recommended for light to medium duty clutch and brake applications and it is available in virtually every drum diameter and shape required.

CHARACTERISTICS

- High Tensile strength
- Uniform friction
- Good fade
- Good wear rate


FRICITIONAL PROPERTIES

Coefficient of Friction (SAE J661):	
Normal*	: 0.43
Hot*	: 0.40
Wear Rate (SAE J661)	
(inch ³ /hp-hr)	: 0.002
Friction Code	: FF
Maximum Operating Limits:	
Rubbing Speed**	: 5000 fpm
Pressure**	: 150 psi
Drum Temperature for	
Constant Operation**	: 550°

MECHANICAL PROPERTIES

Specific Gravity (SAE J380)	: 2.01-2.07
Tensile Strength, PSI (ASTM D638)	: 1478
Shore D Hardness (ASTM D2240-68)	: 72-76

SAE J661A TEST CURVES

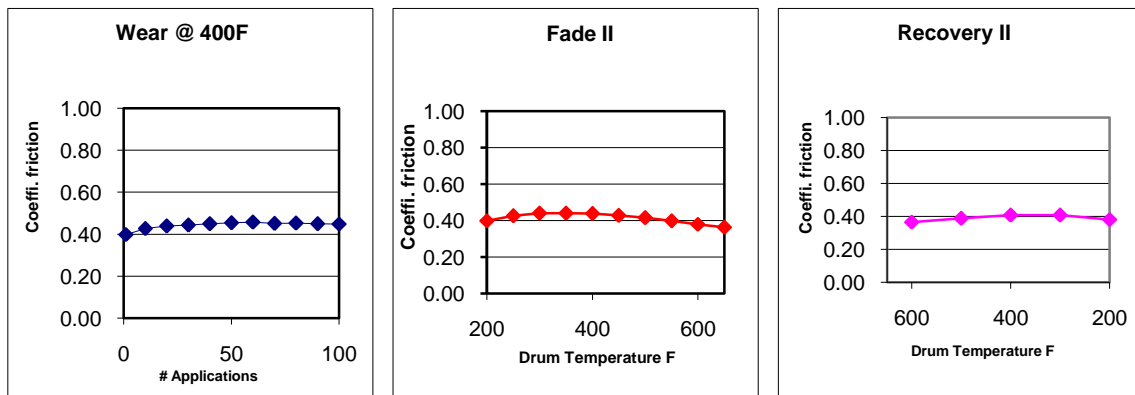

The information presented in this datasheet provides general performance characteristics of the friction material compound under standard test conditions. Values shown are typical or represent average values from test samples. Friction material performance is application specific due to the geometry and conditions of the application, please use this as reference information only. No warranty can be made as to the suitability of this friction material for a specific application. For support with an application, please contact us to discuss your requirements.



*** Friction values shown are for guideline purposes only. Friction values will change with temperature, pressure and speed. Practical design considerations should include a factor of safety based on the specific application.**

**** Maximum operating limits stated are interrelated. Changing any one value will change the maximum limit of the others.**