



# Product Data Sheet: RF 62

## PRODUCT DESCRIPTION

**RF 62** is a rigid molded *non-asbestos metallic* friction material suitable for use in *high friction* brake applications such as tensioning brake. This product features excellent compressibility, fade resistance and high coefficient of static friction. It can be molded into many intricate internal, external, and customer specified shapes.

## CHARACTERISTICS

- Exceptional dimensional stability
- High Tensile strength
- Excellent fade resistance
- High coefficient of static friction
- Good recovery
- High Compressibility


## MECHANICAL PROPERTIES

Specific Gravity (SAE J380) : 1.8  
 Gogan Hardness (SAE J379A) : 46-56  
 Tensile Strength, PSI (ASTM D638) : 3500<sub>min</sub>

## FRICTIONAL PROPERTIES

Coefficient of Friction (SAE J661):  
 Normal\* : 0.52  
 Hot\* : 0.52  
 Wear Rate (SAE J661)  
 (inch<sup>3</sup>/hp-hr) : 0.01<sub>max</sub>  
 Friction Code : GG  
 Static friction @ 130 °F : 0.61  
 Maximum Operating Limits:  
 Rubbing Speed\*\* : 7500 fpm  
 Pressure\*\* : 2000 psi  
 Drum Temperature for  
 Constant Operation\*\* : 650°F

## SAE J661A TEST CURVES

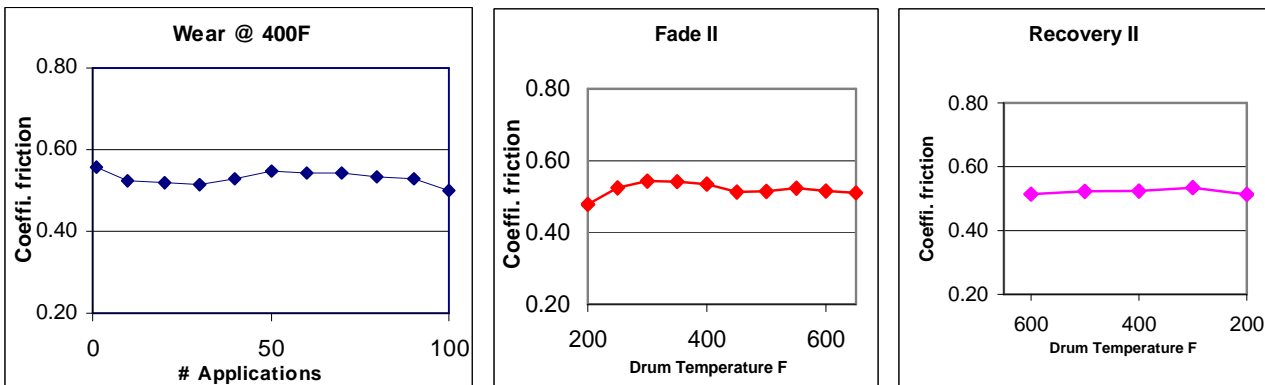

\*Note 1. – Friction values shown are for guide purposes only since values deviate with changes in temperature, pressure and speed. Practical design should include a 25 to 50 percent safety factor.

\*\*Note 2. – Rubbing speed, drum temperature, and pressure are directly related. Changing any one value will change the others. The values shown represent typical conditions, but are not the ultimate limits of the material.