



## Product Data Sheet: RF75

### GENERAL DESCRIPTION

RF75 is a rigid molded *Non-Asbestos, Metallic* friction material, suitable for use in *High Friction* brake applications in a wide variety of equipments such as in agricultural equipment, overhead cranes and heavy duty equipment. RF75 is non-corrosive and non-abrasive. It can be molded into many intricate internal, external, and customer specified shapes.

### FEATURES

- Exceptional dimensional stability
- High tensile strength
- Excellent fade resistance
- High Impact strength
- Excellent wear rate.

### PHYSICAL & MECHANICAL PROPERTIES

Specific Gravity (SAE J380) : 1.9  
 Gogan Hardness (SAE J379A) : 25-30  
 Tensile Strength (ASTM D638) : 4129psi  
 Impact Strength : 17.2 FtLb/inch<sup>2</sup>

### FRICITIONAL PROPERTIES

Coefficient of Friction (SAE J661):

Normal\* : 0.51  
 Hot\* : 0.54

Wear Rate (SAE J661)

(inch<sup>3</sup>/hp-hr) : 0.006<sub>max</sub>

Friction Code

: GG




Maximum Operating Limits:

Rubbing Speed\*\* : 7500 fpm  
 Pressure\*\* : 2000 psi

Drum Temperature for

Constant Operation\*\* : 650°F

### SAE J661A TEST CURVES

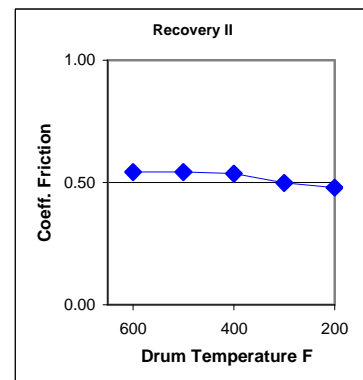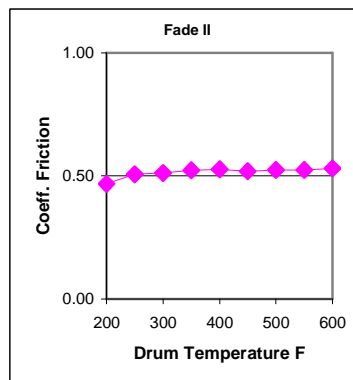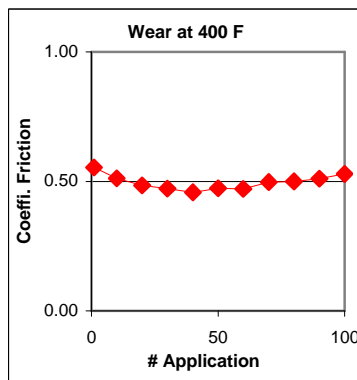

\*Note 1. – Friction values shown are for guide purposes only since values deviate with changes in temperature, pressure and speed. Practical design should include a 25 to 50 percent safety factor.

\*\*Note 2. – Rubbing speed, drum temperature, and pressure are directly related. Changing any one value will change the others. The values shown represent typical conditions, but are not the ultimate limits of the material.